



Push Type Trolley 1/4, 1/2 & 1 Ton



2 & 3 Ton



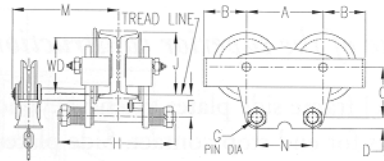


Hand-Geared Trolley 1/2, 1, 2 & 3 Ton

RIGID MOUNT TROLLEYS – PUSH & HAND-GEARED

Cap. (tons)	Push Trolley		Hand-Geared Trolley*		** Min. Beam Depth (in)	Adj for Flange Widths (in)	Min. Curve Rad	OUTLINE DIMENSIONS (IN)																	
	Cat No.	Net Wt. (lbs)	Cat No.	Net Wt. (lbs)				A	B	C	D	WD	**** F Max.	G DIA.	H	J Max.	M Max.	N							
1/2	905401	15	—	—	4	2 ⁵ / ₈ to 4 ⁵ / ₈	2' 6"	4 ³ / ₈	2 ⁹ / ₈	3 ³ / ₁₆	1 ¹ / ₁₆	3 ¹ / ₈	1 ⁵ / ₈	5 ⁵ / ₈	8 ¹ / ₈	3 ¹¹ / ₁₆	—	3 ¹ / ₈							
1	905402	23	—	—	5	3 to 5	3' 6"	6 ¹ / ₈	2 ⁹ / ₁₆	3 ⁷ / ₈	1 ¹ / ₁₆	4	1 ⁷ / ₈	5 ⁵ / ₈	8 ⁷ / ₈	5	9 ³ / ₄	3 ¹ / ₈							
	905405	24	—	—		5 ¹ / ₄ to 7 ³ / ₈													3 to 5	3 ⁹ / ₁₆	11 ¹ / ₈	8 ⁷ / ₈	11 ¹ / ₈	11 ¹ / ₈	
	—	—	905411	40	5 ¹ / ₄ to 7 ³ / ₈	11 ¹ / ₈	11 ¹ / ₈	11 ¹ / ₈	11 ¹ / ₈	11 ¹ / ₈	11 ¹ / ₈														
	—	—	905413	41	5 ¹ / ₄ to 7 ³ / ₈	11 ¹ / ₈	11 ¹ / ₈	11 ¹ / ₈	11 ¹ / ₈	11 ¹ / ₈	11 ¹ / ₈														
2	905403	43	905412	57	6	3 ³ / ₈ to 6	4' 0"	6 ⁷ / ₈	3 ¹³ / ₁₆	4 ⁷ / ₁₆	1	4 ¹⁵ / ₁₆	2	1	10 ⁷ / ₈	5 ¹³ / ₁₆	10 ¹ / ₄	5							
	905406	44	905414	58	6 ¹ / ₄ to 8 ⁷ / ₈	6 ⁷ / ₈	3 ¹³ / ₁₆	4 ⁷ / ₁₆	1	4 ¹⁵ / ₁₆	2	1	13	5 ¹³ / ₁₆	11 ⁷ / ₈	11 ⁷ / ₈									
3	905404	50	905417	65	6	3 ³ / ₈ to 6	4' 0"	6 ⁷ / ₈	4 ³ / ₁₆	5 ³ / ₄	1 ³ / ₈	4 ¹⁵ / ₁₆	3 ¹ / ₄	1 ¹ / ₄	12 ³ / ₄	18 ³ / ₈	6								
	905407	52	905418	67		6 ¹ / ₈ to 8 ⁷ / ₈									6 ⁷ / ₈	4 ³ / ₁₆		5 ³ / ₄	1 ³ / ₈	4 ¹⁵ / ₁₆	3 ¹ / ₄	1 ¹ / ₄	15 ³ / ₄	5 ¹³ / ₁₆	19 ⁷ / ₈
	905408	54	905419	69		9 to 11									6 ⁷ / ₈	4 ³ / ₁₆		5 ³ / ₄	1 ³ / ₈	4 ¹⁵ / ₁₆	3 ¹ / ₄	1 ¹ / ₄	17 ⁷ / ₈	21 ¹ / ₈	

Heavy Duty Rigid Mount Trolleys



HEAVY DUTY RIGID MOUNT TROLLEYS – PUSH & HAND-GEARED

1	900211	35	900261	50	6	3 to 5	3' 0"	7 ⁵ / ₈	3	3 ⁷ / ₈	3 ³ / ₄	4	1 ⁷ / ₈	5 ⁵ / ₈	8 ⁷ / ₈	10 ⁹ / ₁₆	3 ¹ / ₈	
	900212	38	900262	53		5 ¹ / ₈ to 7 ¹ / ₄									11 ¹ / ₄	4 ⁷ / ₈		11 ¹¹ / ₁₆
	900213	41	900263	56		7 ¹ / ₂ to 9 ¹ / ₈									12 ³ / ₄	12 ⁵ / ₈		
2	900221	45	900271	60	6	3 ³ / ₈ to 6	4' 0"	9 ¹ / ₈	3	4 ¹ / ₈	1 ⁵ / ₁₆	4	2 ¹ / ₈	1	9 ¹ / ₂	10 ¹ / ₁₆	5	
	900222	48	900272	63		6 ¹ / ₄ to 8 ⁵ / ₈									12 ¹ / ₈	4 ⁷ / ₈		11 ³ / ₈
	900223	51	900273	66		8 ⁷ / ₈ to 11 ¹ / ₄									14 ³ / ₄	12 ¹¹ / ₁₆		
3	900231	55	900281	70	6	4 to 6 ¹ / ₄	4' 0"	9 ¹ / ₈	3 ¹ / ₄	4 ¹ / ₂	1 ³ / ₈	4	2 ¹ / ₂	1 ¹ / ₄	12	16 ¹ / ₂	6	
	900232	58	900282	73		6 ³ / ₈ to 8 ⁵ / ₈									14 ³ / ₈	4 ⁷ / ₈		17 ¹¹ / ₁₆
	900233	62	900283	77		8 ³ / ₄ to 11									16 ³ / ₄	18 ⁷ / ₈		

* Hand-geared trolleys have standard hand chain drop of 9' - 6". Longer chain available. ** When used on smallest I-Beam size, beam must be free of all obstructions such as clips, suspension bolts and nuts. *** For 1/4 and 1/2 ton applications on wider flange beams, mount on 1 ton trolleys. **** Dimension "F" is based on largest size beam on which trolley will operate. Dimension increases slightly for each of the smaller beam sizes.